



Designed for possibilities.
Made for people.

Altro Wood collection





Altro Wood



Bleached Bamboo | WSM2074*
WR463 / A1M392 / LRV 42



Flaxen Oak | WSM2054
WR338 / A1M27 / LRV 38

500 x 100mm



Castle Oak | WSM2075
WR335 / A1M335 / LRV 51

1000 x 125mm



White Oak | WSM2051
WR335 / A1M335 / LRV 52

500 x 100mm



Honey Beech | WSM2071
WR462 / A1M462 / LRV 43

333 x 62mm



Forest Oak | WSM2069
WR353 / A1M225 / LRV 25

500 x 100mm



Mellow Oak | WSM2056
WR340 / A1M340 / LRV 37

500 x 100mm



Mellow Maple | WSM2068
WR352 / A1M352 / LRV 27

1000 (500/450) x 100mm

Codes: WR = weld rod, A1M = mastic, LRV = light reflectance value
Light Reflectance Values measured in accordance with BS8493:2008.
Exact material match with samples cannot be guaranteed.

* Design as shown



500 x 100mm

Greyed Oak | WSM2063
WR347 / A1M347 / LRV 38



1000 (550/450) x 100mm

Pale Cherry | WSM2052
WR336 / A1M239 / LRV 22



1000 x 125mm

Tower Oak | WSM2077
WR322 / A1M239 / LRV 19



500 x 100mm

Black Oak | WSM2064
WR348 / A1M348 / LRV 7



1000 (550/450) x 100mm

Light Maple | WSM2055
WR339 / A1M339 / LRV 24



1000 x 125mm

Great Oak | WSM2076
WR339 / A1M339 / LRV 22



1000 (550/450) x 100mm

Classic Cherry | WSM2053
WR337 / A1M337 / LRV 17



1000 (550/450) x 100mm

Mature Walnut | WSM2061
WR345 / A1M62 / LRV 6



1000 x 166mm

Imperial Oak | WSM2078
WR467 / A1M467 / LRV 17



Warm Bamboo | WSM2073*
WR342 / A1M224 / LRV 21



1000 (550/450) x 100mm

Mid Walnut | WSM2057
WR341 / A1M160 / LRV 15



1000 x 166mm

Sovereign Oak | WSM2079
WR468 / A1M62 / LRV 10

Códigos: WR = Cordón de soldadura, A1M = Mástique, LRV = Valor de reflectancia de la Luz

Los Valores de Reflectancia de la luz se miden de acuerdo con BS8493:2008.

Las muestras no pueden garantizar un color exacto.

* Diseño tal como se muestra

Altro Wood Silence



1000 x 125mm

Nordic Oak | WSMSC2816
WR335 / A1M335 / LRV 51



500 x 100mm

Straw Oak | WSMSC2811
WR338 / A1M27 / LRV 38



Pale Bamboo | WSMSC2815*
WR463 / A1M392 / LRV 42



500 x 100mm

Harvest Oak | WSMSC2805
WR340 / A1M340 / LRV 37



1000 (550/450) x 100mm

Country Maple | WSMSC2802
WR339 / A1M339 / LRV 24



1000 (550/450) x 100mm

Regal Cherry | WSMSC2804
WR337 / A1M337 / LRV 17



1000 x 125mm

Old Oak | WSMSC2817
WR339 / A1M339 / LRV 22



1000 (550/450) x 100mm

Bay Walnut | WSMSC2810
WR341 / A1M160 / LRV 15



500 x 100mm

Silver Oak | WSMSC2808
WR347 / A1M347 / LRV 38



1000 (550/450) x 100mm

Smokey Cherry | WSMSC2803
WR336 / A1M239 / LRV 22



1000 x 125mm

Galleon Oak | WSMSC2818
WR322 / A1M239 / LRV 19



1000 x 166mm

French Oak | WSMSC2820
WR468 / A1M62 / LRV 10

Abkürzungen: WR = Schweißschnüre, A1M = Altro mastic Dichtmasse, LRV = Lichtreflexionswert

Los Valores de Reflectancia de la luz se miden de acuerdo con BS8493:2008.

Eine exakte Übereinstimmung des Materials mit Mustern kann nicht garantiert werden.

* Design wie abgebildet

Altro Wood Acoustic



1000 x 125mm

Relax | WSMA3798
WR335 / A1M335 / LRV 51



500 x 100mm

Hush | WSMA3781
WR338 / A1M27 / LRV 38



Spirit | WSMA3797*
WR463 / A1M392 / LRV 42



1000 (550/450) x 100mm

Calm | WSMA3795
WR352 / A1M352 / LRV 27



1000 (550/450) x 100mm

Lull | WSMA3782
WR341 / A1M160 / LRV 15



1000 x 166mm

Soothe | WSMA37102
WR468 / A1M62 / LRV 10

Please note: The measurements stated next to each sample is the size of the plank(s) within the 2m x 20m sheet.

Nota: Las medidas indicadas junto a cada muestra son del tamaño de la(s) lama(s) de imitación a madera dentro de las medidas de 2x20 m de la lámina.

Bitte beachten Sie: Die Maße, die bei jedem Muster angegeben werden, entsprechen den Brettgrößen innerhalb der 2 m x 20 m Rolle.

All information is correct at the time of print and is subject to change without prior notice.

Sustainability / Sostenibilidad / Nachhaltigkeit



Indication of the level of emissions of volatile substances in the ambient air that are posing a toxic hazard on being inhaled, rated on a scale from A+ (very low emissions) to C (high emissions).

†A+ BRE generic green guide rating for resilient flooring, full details available at www.thegreenguide.org.uk

Posee una calificación A+ en la Guía Verde de Prescripción Global del Método de Evaluación Medioambiental BRE. Para más información, visita www.thegreenguide.org.uk

A+ BRE Global's Green Guide™, der allgemeine Umweltleitfaden für elastische Bodenbeläge; weitere Informationen finden Sie unter www.thegreenguide.org.uk

Installation and Maintenance


Install according to installation instructions and codes of practice. Refer to cleaning card. Failure to install and maintain flooring according to installation instructions can affect performance and slip resistance. Protect from other trades. Oil residue, certain cleaning agents, asphalt and anti-oxidants in some rubber can cause traffic stain. Caution, Ketone / aromatic solvents. For further technical information please visit www.altro.com

Instalación y Mantenimiento

Instalar según instrucciones y códigos de prácticas y seguir instrucciones de limpieza. Una mala instalación o un mantenimiento incorrecto puede afectar al rendimiento y a la resistencia al deslizamiento del suelo. Proteja el suelo durante la instalación de otros gremios. Los restos de aceite, algunos productos de limpieza, asfalto o antioxidantes pueden crear manchas de tráfico. Precaución con los solventes de Cetona o aromáticos. Si desea obtener más información técnica, visite www.altroscandess.com

Installation und Pflege

Verlegung gemäß Anleitung und empfohlener Vorgehensweise. Verweisen Sie auf die Reinigungskarte. Erfolgt Verlegung und Pflege des Bodenbelags nicht gemäß Anleitung, können Leistung und Rutschfestigkeit beeinträchtigt werden. Vor anderen Gewerken schützen. Ölrückstände, bestimmte Reinigungsmittel, Asphalt und Antioxidantien können in einigen Belagsarten Flecken hinterlassen. Vorsicht, Ketone / aromatische Lösungsmittel. Weitere technische Informationen finden Sie auf unserer Website www.altro.com

 Altro, Designed for possibilities. Made for people. Altro Wood, Altro Wood Silence, Altro Wood Acoustic and Altro Easyclean technology are trademarks of Altro Limited.



Altro Limited a company certified by SGS to ISO 9001 and ISO 14001.

 +44 (0) 1462 707 700

 www.altro.com

 enquiries@altro.com

 +34 91 549 5230


 www.altroscandess.com

 suelos@altroscandess.com


 +61 3 9764 5666

 www.asf.com.au

 info@asf.com.au

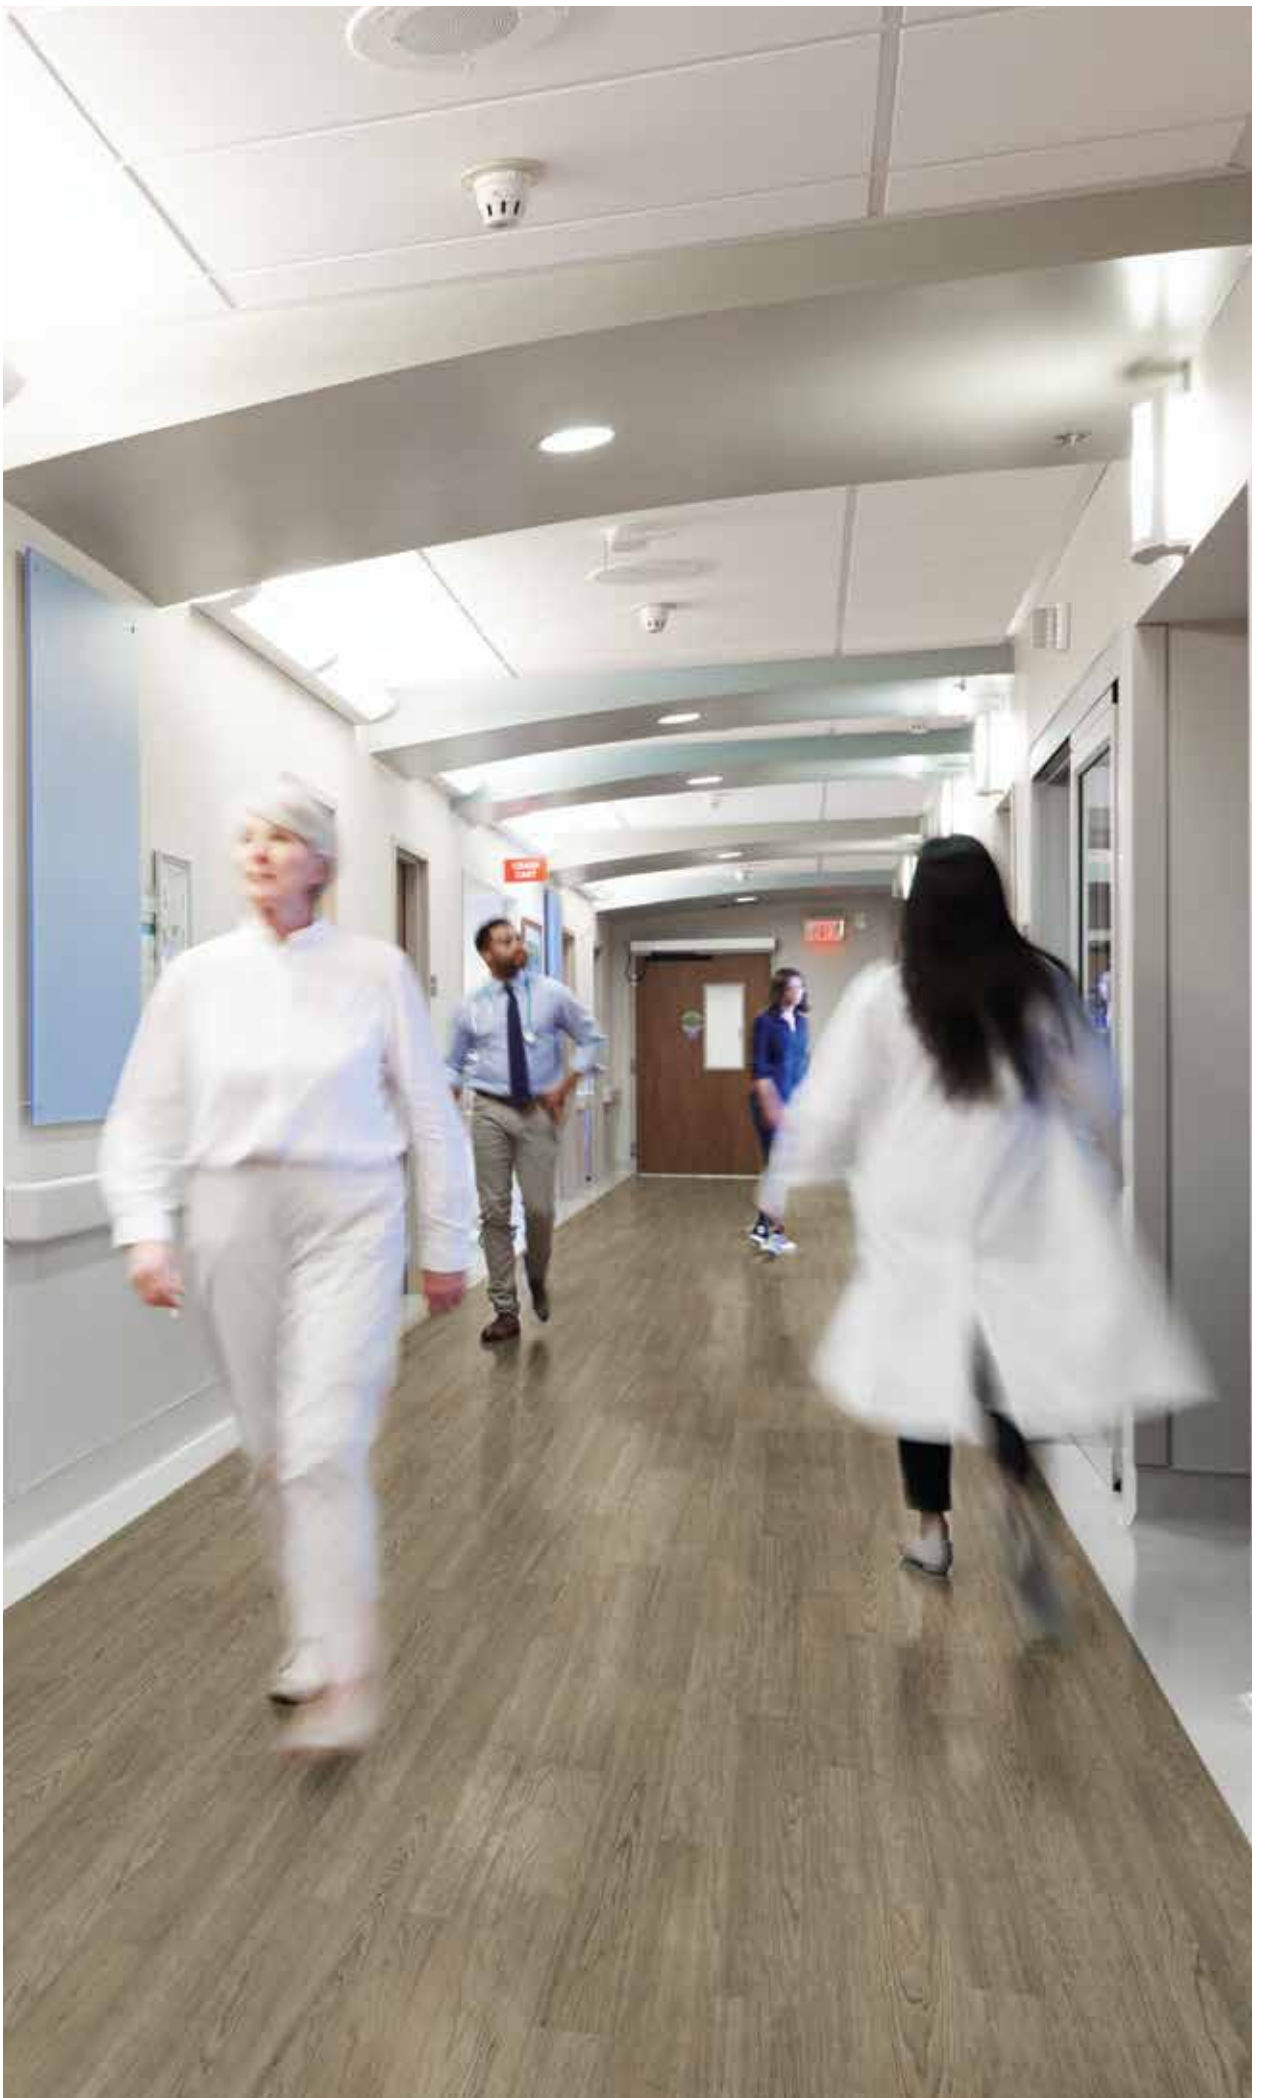









Altro Wood™

Flooring type Tipo de pavimento Belagsart	Slip resistance Resistencia al deslizamiento Rutschsicherheit	Thickness Espesor total Gesamtdicke	Wear layer Capa de uso Nutzschichtdicke	Weight Peso Flächengewicht	Roll dimensions Dimensiones del rollo Rollenformat	Fire performance Reacción al fuego Brandverhalten	Sound Insulation Aislamiento acústico Trittschallminderung
							
EN ISO 10582	DIN 51130 / BGR 181 EN 13893	EN ISO 24346	EN ISO 24340	EN ISO 23997	EN ISO 24341	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	EN ISO 10140
Heterogenous floor Suelo de Antideslizante Heterogener Bodenbelag	R10 DS	2mm	0.7mm	2.66kg/m ²	2m x 20m = 40m ²	Bfl s1	Approx 4dB

CE 17 | Debolon Dessauer Bodenbeläge GmbH & Co. KG, Ebertallee 209, 06846 Dessau-Roßlau |
DIN EN ISO 10582 | DoP-No. R 300.1-RN-D028 | Reaction to fire: Bfl s1 | Slip resistance: DS |
Formaldehyde: E1 | DIN EN 14041:2008 | 1658 | Resilient floor covering to be used within a building











Altro Wood™ Silence

Flooring type Tipo de pavimento Belagsart	Slip resistance Resistencia al deslizamiento Rutschsicherheit	Thickness Espesor total Gesamtdicke	Wear layer Capa de uso Nutzschichtdicke	Weight Peso Flächengewicht	Roll dimensions Dimensiones del rollo Rollenformat	Fire performance Reacción al fuego Brandverhalten	Sound Insulation Aislamiento acústico Trittschallminderung
							
EN 651	DIN 51130 / BGR 181 EN 13893	EN ISO 24346	EN ISO 24340	EN ISO 23997	EN ISO 24341	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	EN ISO 10140
Heterogenous floor Suelo de Antideslizante Heterogener Bodenbelag	R10 DS	2.85mm	0.7mm	2.6kg/m ²	2m x 20m = 40m ²	Cfl s1	Approx 15dB

CE 17 | Debolon Dessauer Bodenbeläge GmbH & Co. KG, Ebertallee 209, 06846 Dessau-Roßlau |
DIN EN 651 | DoP-No. R 200.1 Silence-RN-D029 | Reaction to fire: Cfl s1 | Slip resistance: DS |
Formaldehyde: E1 | DIN EN 14041:2008 | 1658 | Resilient floor covering to be used within a building

Altro Wood™ Acoustic

Flooring type Tipo de pavimento Belagsart	Slip resistance Resistencia al deslizamiento Rutschsicherheit	Thickness Espesor total Gesamtdicke	Wear layer Capa de uso Nutzschichtdicke	Weight Peso Flächengewicht	Roll dimensions Dimensiones del rollo Rollenformat	Fire performance Reacción al fuego Brandverhalten	Sound Insulation Aislamiento acústico Trittschallminderung
							
EN 651	DIN 51130 / BGR 181 EN 13893	EN ISO 24346	EN ISO 24340	EN ISO 23997	EN ISO 24341	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	EN ISO 10140
Heterogenous floor Suelo de Antideslizante Heterogener Bodenbelag	R10 DS	3.9mm	0.7mm	2.9kg/m ²	2m x 20m = 40m ²	Cfl s1	Approx 19dB

CE 17 | Debolon Dessauer Bodenbeläge GmbH & Co. KG, Ebertallee 209, 06846 Dessau-Roßlau |
DIN EN 651 | DoP-No. R 450.1 Silence-RN-D030 | Reaction to fire: Cfl s1 | Slip resistance: DS |
Formaldehyde: E1 | DIN EN 14041:2008 | 1658 | Resilient ACfloor covering to be used within a building

